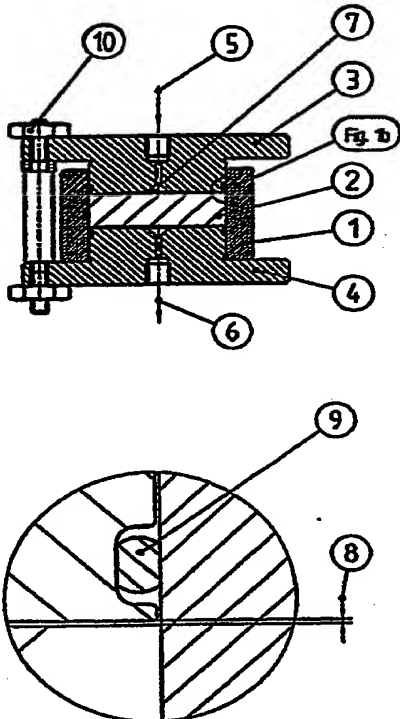


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>B01D 15/08, G01N 30/60</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 95/34359</b> <b>(43) International Publication Date:</b> 21 December 1995 (21.12.95)
<b>(21) International Application Number:</b> PCT/SE95/00632 <b>(22) International Filing Date:</b> 2 June 1995 (02.06.95) <b>(30) Priority Data:</b> 9402091-4 14 June 1994 (14.06.94) SE <b>(71) Applicant (for all designated States except US):</b> PHARMACIA BIOTECH AB [SE/SE]; S-751 82 Uppsala (SE). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> PETTERSSON, Conny [SE/SE]; Enspännargatan 33, S-165 57 Hässelby (SE). PORRVIK, Ingrid [SE/SE]; Årstagatan 18 D, S-754 34 Uppsala (SE). ERIKSSON, Eva [SE/SE]; Fröna gatan 7, S-754 36 Uppsala (SE). <b>(74) Agents:</b> BERGANDER, Håkan et al.; Pharmacia AB, Patent Dept., S-751 82 Uppsala (SE).	<b>(81) Designated States:</b> AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>	
<b>(54) Title:</b> A CHROMATOGRAPHY COLUMN <b>(57) Abstract</b> <p>A liquid chromatography column comprised of a column tube which includes a chromatographic matrix, liquid flow inlet means and liquid flow outlet means, and a distributor located adjacent the inlet and functioning to distribute the incoming liquid. The column is characterized in that the matrix is monolithic and porous; and in that when eluant passes through the matrix a liquid accommodating gap which is devoid of matrix material is present between the matrix and the distributor.</p> <div style="text-align: right;">  </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## A CHROMATOGRAPHY COLUMN

### TECHNICAL FIELD

The present invention relates to a column for liquid chromatography.

### DESCRIPTION OF THE PRIOR ART

In liquid chromatography on a porous matrix, a liquid in which a compound is dissolved is allowed to pass the matrix with the compound passing through one or more adsorption/desorption stages in the matrix.

Liquid chromatography matrices normally consist of particles (e.g. beads) which are packed to form a bed in a column tube. The bed is normally held in place in the tube with the aid of two adaptors (plates) which each cover a respective end of the bed and therewith also the cross-sectional area of the column tube. One of the adaptors will normally include an inlet for eluant which prior to penetrating the bed passes through a distributor or spreader which distributes the flow of eluant uniformly over the end-area of the bed. The distributor may have a more or less sophisticated construction. Typical distributors are filter papers, plates/discs in which a large number of holes are disposed uniformly across the plate/disc. In some cases, there is used a central inlet from which there extends a system of passageways which function to distribute the liquid to the distributing holes in the plate.

In order to minimize diffusion and zone broadening during a chromatographic process, the distributor plate is placed in abutment with the inlet area of the matrix bed. This eliminates the risk of particles swirling up from the bed. One drawback with packed chromatography beds is that the beds readily subside such as to form cracks, particularly in conjunction with changes in the rate of flow of the eluant, or when the matrix dries out.

An alternative to matrix beds which consist in packed particles is found in the so-called continuous matrices (also called monolithic matrices) which have been porous. This type of matrix does not tend to form channels as a result of subsidence or settling of the bed. By

continuous (monolithic) matrices is meant matrices which are intrinsically coherent. Matrices which consist of packed membranes or filters are not monolithic.

#### PROBLEMS ENCOUNTERED WITH THE KNOWN TECHNIQUE

It has been found that when conventional distribution techniques are applied to continuous matrices, it is difficult to achieve uniform penetration of the eluant across the end-area of the matrix. The eluant readily penetrates the matrix in the vicinity of the distribution holes but scarcely spreads to those parts of the matrix which lie between said holes. This results in mutually parallel, channel-like flows in the matrix and to a low matrix efficiency, which in turn results in low numbers of theoretical plates or low elution volumes ( $V_e$ ) and also in unfavourable symmetry factors (symmetry factors at 10% of the peak height and defined so that the highest symmetry factor corresponds to 1). The problem is most accentuated in matrices which produce low counter-pressures, i.e. macro-porous matrices of large pore volumes and large pores.

#### THE INVENTION

It has now been found that the number of theoretical plates, elution volumes and symmetry factors can be improved by providing a liquid gap between the matrix and the distributor during the chromatography process. The positive effect thus achieved is because when the liquid penetrates into the matrix, there is created a continuous layer across the matrix end-area.

The inventive liquid chromatography column is constructed from a column tube which includes a chromatography matrix and a distributor or spreader placed adjacent the inlet and functioning to distribute the incoming liquid. The column is characterized in that the matrix is monolithic and porous and in that as the liquid passes through the matrix, there is present between the matrix and the distributor a gap which does not contain matrix material. The remainder of the column may be of known design. The width of the gap is such as to impart improved properties to the column with respect to number of theoretical plates, symmetry factors and elution volumes in

comparison with the case when the distributor plate abuts the matrix.

Our experimental results (see Table 1) show that the number of theoretical plates, elution volumes, peak widths and symmetry factors are functions of gap width, and that the chromatographic optimal values for respective functions need not necessarily be achieved with a common gap width. According to the invention, it is advantageous for the gap width to be such that the number of theoretical plates will lie within  $\pm 50\%$  of the maximum value that can be achieved with variation of the gap width. Correspondingly, in accordance with the present invention, the gap width should be adjusted so that the elution volume lies within 80-100% of the total liquid content of the matrix. The symmetry factor should be optimized with the aid of the gap width in relation to the symmetry factor obtained when the gap width is zero, i.e. when the distributor lies flush with the matrix. Symmetry factors that can be achieved by varying the gap width are often 0.5-5, preferably 0.5-3.

In practice, the above general guidelines for achieving optimal chromatographic conditions can normally be attained when the gap width is  $< 2$  mm, such as  $< 1$  mm and  $> 0.005$  mm.

No gap is required in zero liquid flow conditions, but can arise as a result of compression of the monolithic matrix by the liquid flow. In practice, it is preferable that the gap is created when producing the column, when the inlet adaptor and associated distributor or spreader is moved towards the matrix inlet area. In this regard, we have found it very suitable to adapt the width of the gap so that it is always discernible to the eye.

The distributor will preferably be sufficiently rigid to withstand the pressure of the liquid flow and not flex or bulge outwards towards the matrix.

Figure 1a illustrates an embodiment of an inventive column into which a flow of liquid is introduced. The column tube (1) is filled with a continuous matrix (2) and the inlet area and outlet area of the matrix are covered by a respective adaptor (3 and 4). The adaptor (3) covering the inlet area is provided with a liquid flow inlet (5) while the adaptor covering the outlet area of the matrix is provided with a

liquid flow outlet (6). The liquid flows in the arrowed directions. The inlet adaptor (3) includes a distribution function or facility (7), preferably in the form of a distribution cone. A matrix-free gap (8) is located between the matrix inlet area and the abutment surface of the inlet adaptor (3). The surface of the inlet adaptor proximal to the matrix may conveniently be bevelled from the centre of the adaptor and out towards the periphery thereof, so as to improve distribution of the incoming liquid and minimize the dead volume. The adaptors (3, 4) each include sealing elements (9), for instance in the form of O-rings, which seal against the inner surface of the column tube. The upper adaptor includes means (10) which enable the adaptor to be raised and lowered in relation to the upper surface of the matrix. In the case of the illustrated embodiment, the means (10) has the form of a setting screw.

Figure 1b is an enlarged view of Figure 1a, with the same reference signs as those used in Figure 1a.

Monolithic matrices can be produced in different ways, for instance by the polymerization of inverse emulsions where the oil phase includes polymerizable monomers, or by bulk-polymerization together with a so-called porogen (a solvent which can be washed out after polymerization).

The requirement of a gap in accordance with the invention is determined by the counterpressure exerted by a continuous matrix on the liquid flow to be used in a chromatographic process. Discounting pore sizes and rates of flow, this generally means that the counterpressure radially across the matrix shall be smaller than the counterpressure axially of the matrix (in the flow direction).

Normally, relevant matrices will have a large pore volume ( $> 2 \text{ cm}^3/\text{g}$ , preferably  $5\text{-}30 \text{ cm}^3/\text{g}$  (measured as a dry matrix of given volume)) in combination with throughflow pores that have a smallest diameter of  $0.05 \text{ }\mu\text{m}$  or larger.

The inventive column may include a number of monolithic chromatographic matrices stacked one upon the other.

According to the invention, the chromatographic process is carried

out by eluting the contents of the column with a liquid flow with which the counterpressure exerted radially across the matrix will be smaller than the counterpressure exerted axially of the matrix (in the flow direction).

#### EXPERIMENTAL SECTION

##### Material and Methods

The matrix used in this experiment was a continuous matrix produced by polymerizing styrene/divinyl benzene in an inverse emulsion in accordance with DE 1160616 and EP 60318. The matrix was placed in a column tube (diameter 35 mm). The matrix had a height of 10 mm and its diameter was adapted to the diameter of the tube, so as to obtain sealing engagement of the matrix with the inner surface of the tube. The column was equipped with a raisable and lowerable adaptor fitted with an eluant distributor. The adaptor functioned to raise/lower the distribution plate relative to the end-area of the matrix when twisted.

The chromatographic system used was a FPLC system with UV detectors (Pharmacia Biotech AB, Uppsala, Sweden).

The rate of flow was 300 cm/h = 48 ml/min.

The sample was 10% (w/w-%) NaNO<sub>3</sub> in 0.5 M NaCl.

Table 1. Bottom value, elution volume ( $V_e$ ), top width and symmetry factor as a function of gap width.

Gap mm	Bottom value N/m	$V_e$ ml	Top width	Symmetry factor*
0	3600	3.6	2.4	10.0
0.13	29400	9.0	2.1	2.7
0.19	29000	9.8	2.3	2.1
0.25	31500	10.2	2.3	2.0
0.31	29500	10.3	2.4	2.4
0.38	28900	10.2	2.4	2.4
0.50	29500	10.3	2.4	2.6

\*Symmetry factor at 10% of the top height and defined so that the highest symmetry corresponds to 1.

The results shown in the Table illustrate that bottom value, elution volume, top width and symmetry factor are functions of gap width.



## CLAIMS

1. A liquid chromatography column comprised of a column tube including a chromatographic matrix, liquid flow inlet means and a liquid flow outlet means, and a distributor located adjacent the inlet and functioning to distribute the incoming liquid, characterized in that the matrix is monolithic and porous; and in that when eluant passes through the matrix a liquid accommodating gap which is devoid of matrix material is present between the matrix and the distributor .
2. A column according to Claim 1, characterized in that the gap is smaller than 2 mm.
3. A column according to any one of Claims 1-2, characterized in that as the liquid flows through the matrix during chromatography, the counterpressure exerted radially across the matrix is smaller than the counterpressure exerted axially of the matrix (in the flow direction) .
4. A column according to one of Claims 1-3, characterized in that the porosity of the matrix is greater than 2 cm<sup>3</sup>/g.

1/1

Fig. 1a


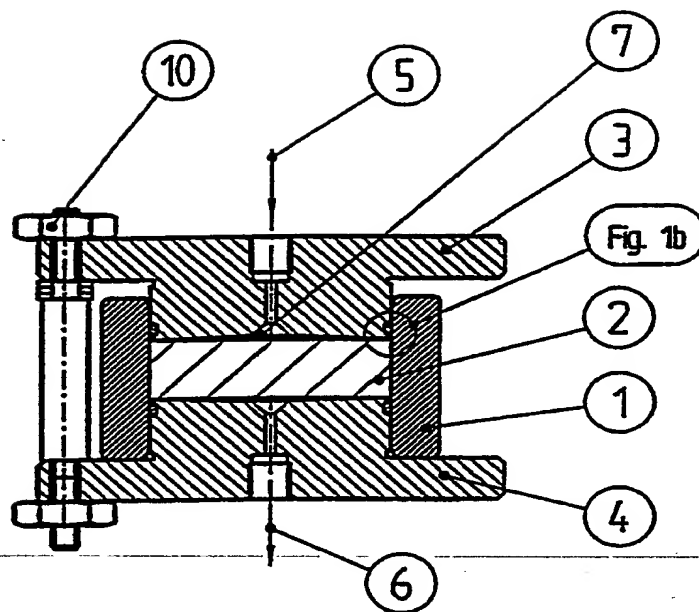


Fig. 1b

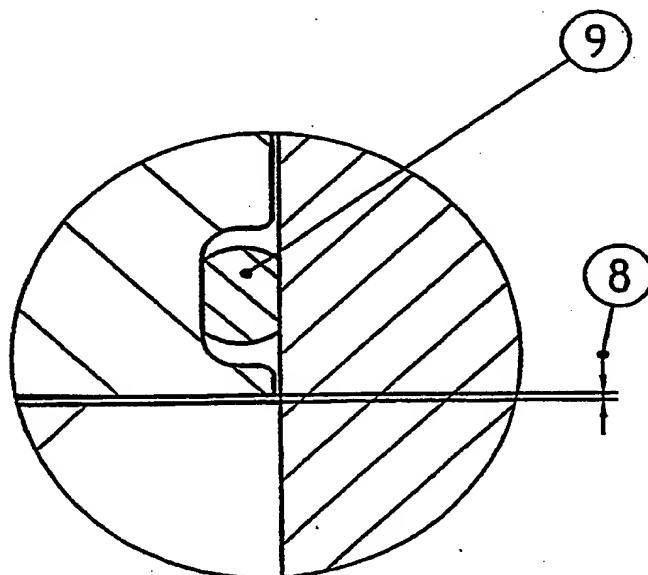

## INTERNATIONAL SEARCH REPORT

International application No.

**PCT/SE 95/00632**

### A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B01D 15/08, G01N 30/60

IPC6: BOLD 15/08, G01N 30/80  
According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

**Minimum documentation searched (classification system followed by classification symbols)**

IPC6: BOLD, GOIN

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

**SE,DK,FI,NO** classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0161493 A2 (THE PERKIN-ELMER CORPORATION), 21 November 1985 (21.11.85), page 3, line 9 - line 21; page 4, line 32 - page 5, line 24, abstract	1-4

☐ Further documents are listed in the continuation of Box C.

**X** See patent family annex.

## \* Special categories of cited documents:

- "A"** document defining the general state of the art which is not considered to be of particular relevance
- "B"** earlier document but published on or after the international filing date
- "L"** document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O"** document referring to an oral disclosure, use, exhibition or other means
- "P"** document published prior to the international filing date but later than the priority date claimed

- "T"** later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X"** document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y"** document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "Z"** document member of the same patent family

**Date of the actual completion of the international search**

18 Sept 1995

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

**Date of mailing of the international search report**

27-09-1995

**Authorized officer**

**Inger Löfgren**  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

Information on patent family members

28/08/95

International application No.

PCT/SE 95/00632

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0161493	21/11/85	CA-A- 1239591 DE-A- 3586068 JP-A- 60239668 US-A- 4587014	26/07/88 25/06/92 28/11/85 06/05/86